

FIG. 1


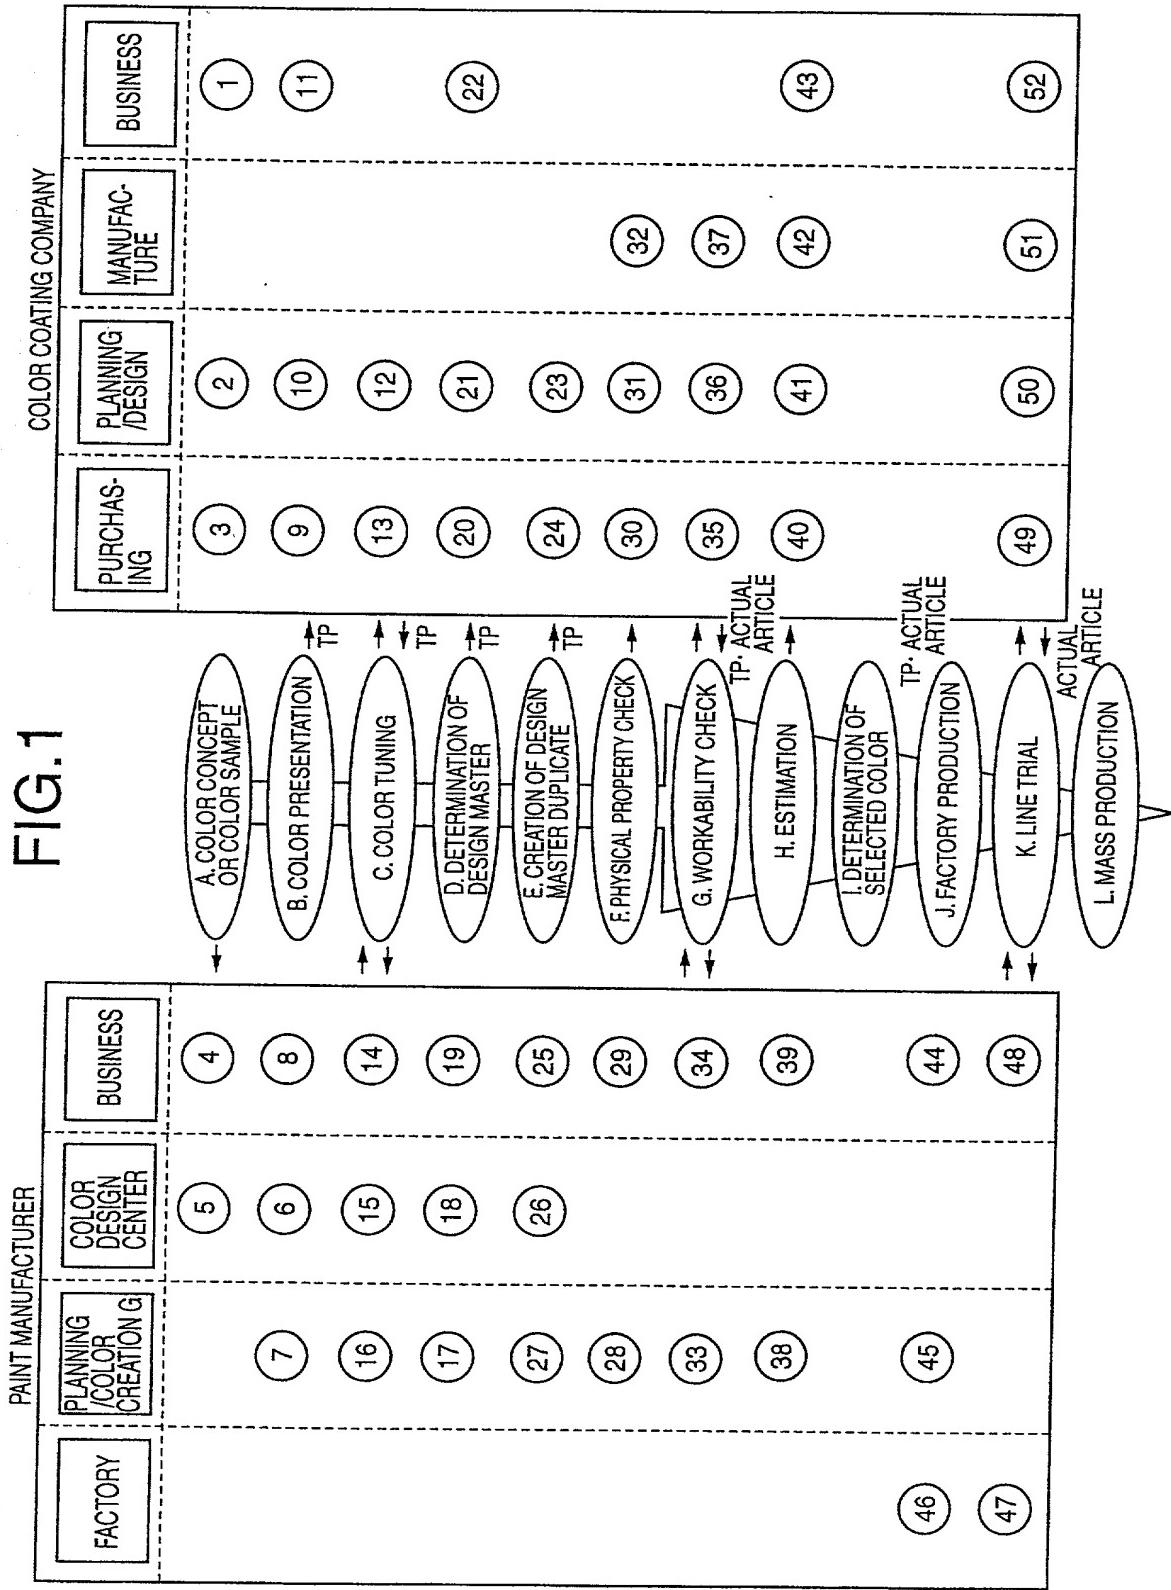


FIG-2

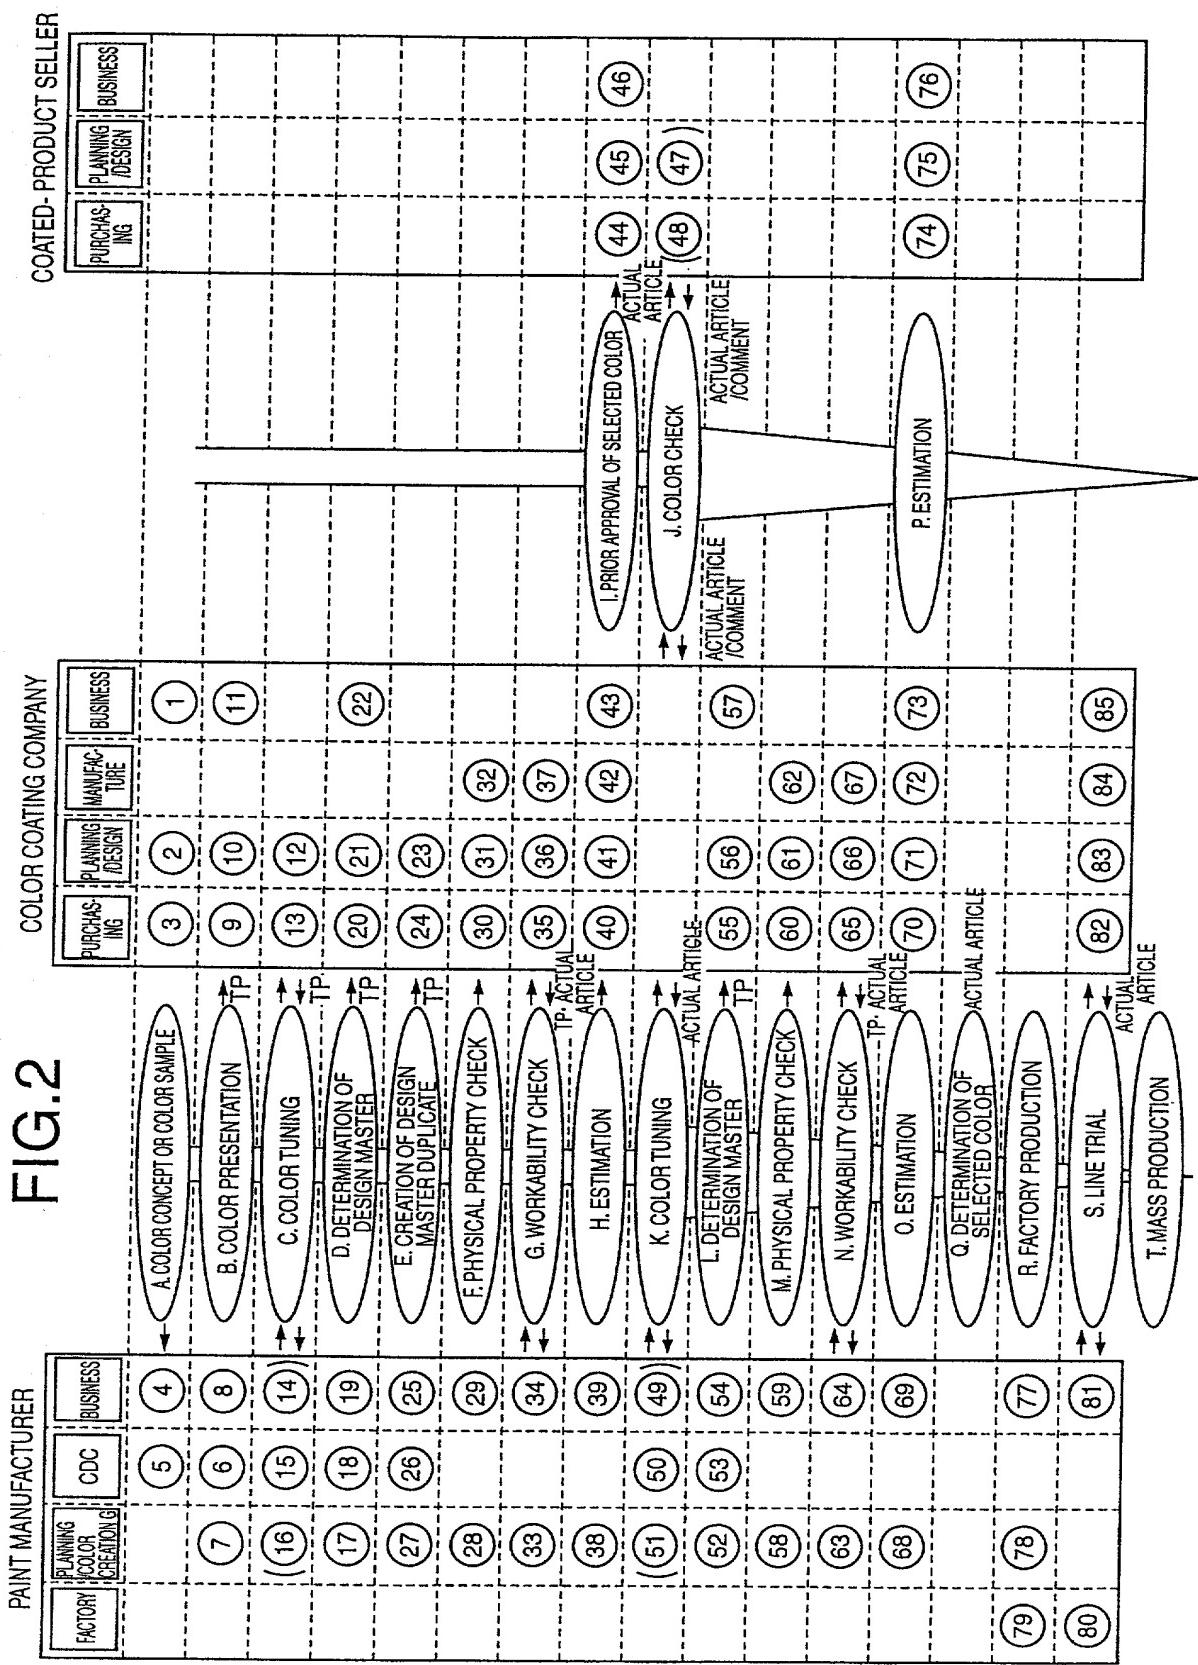

10,070743

FIG.3

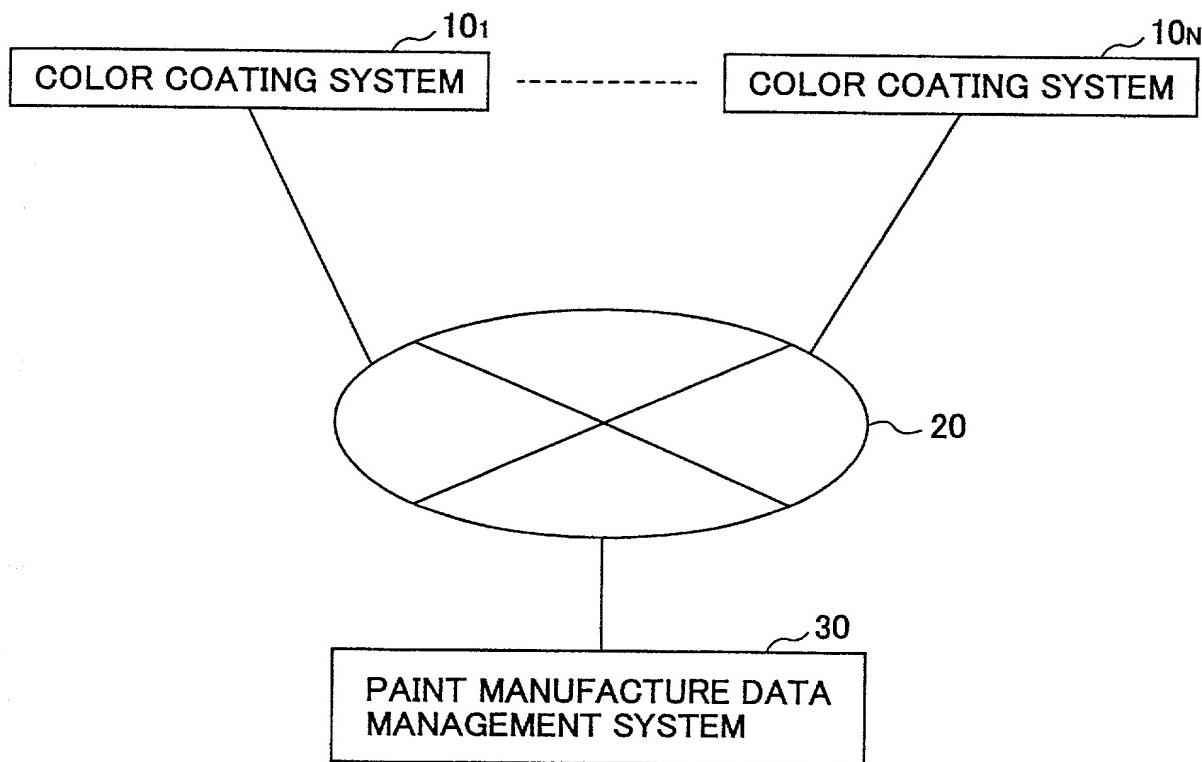


FIG.4



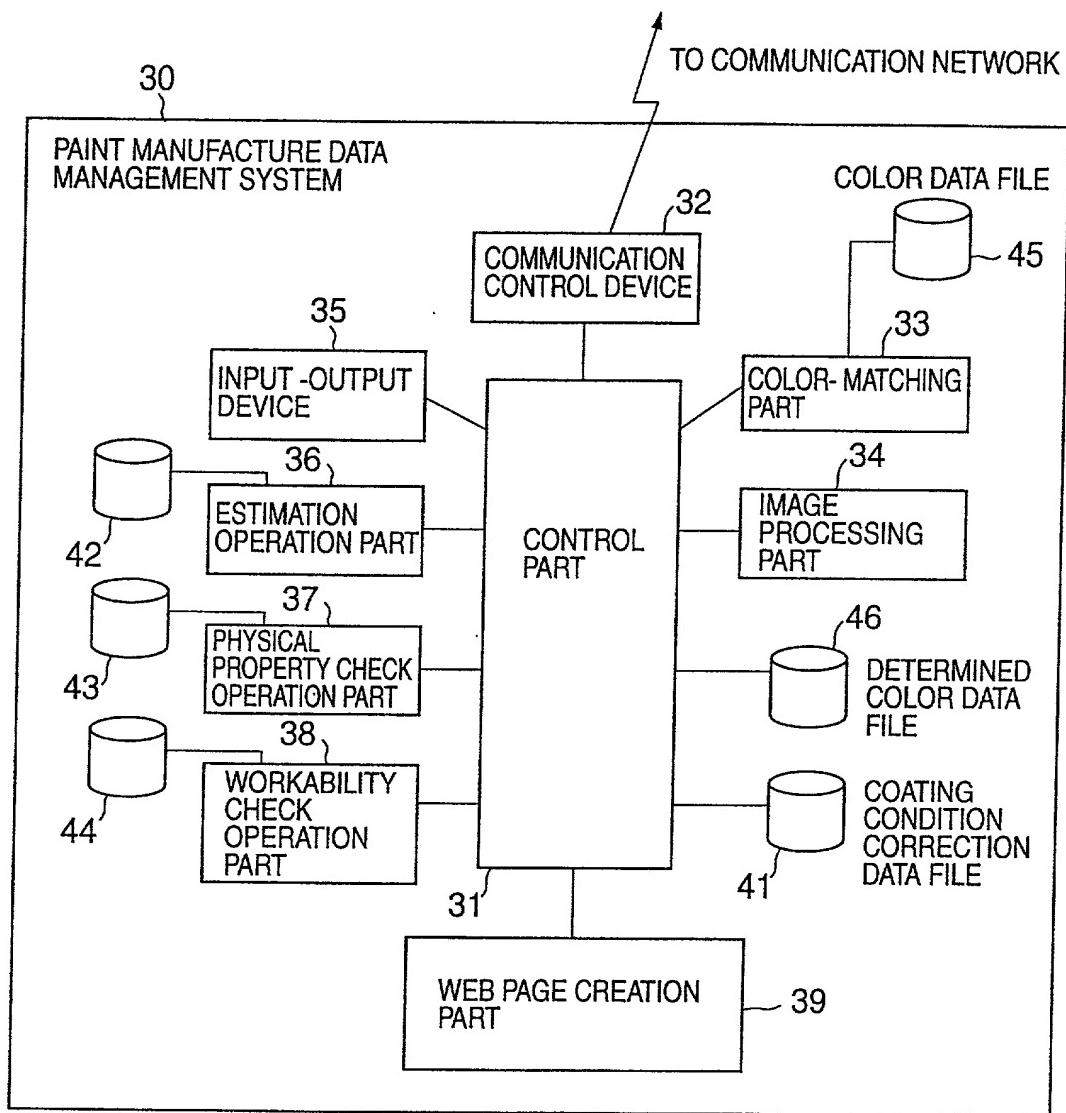


FIG.5

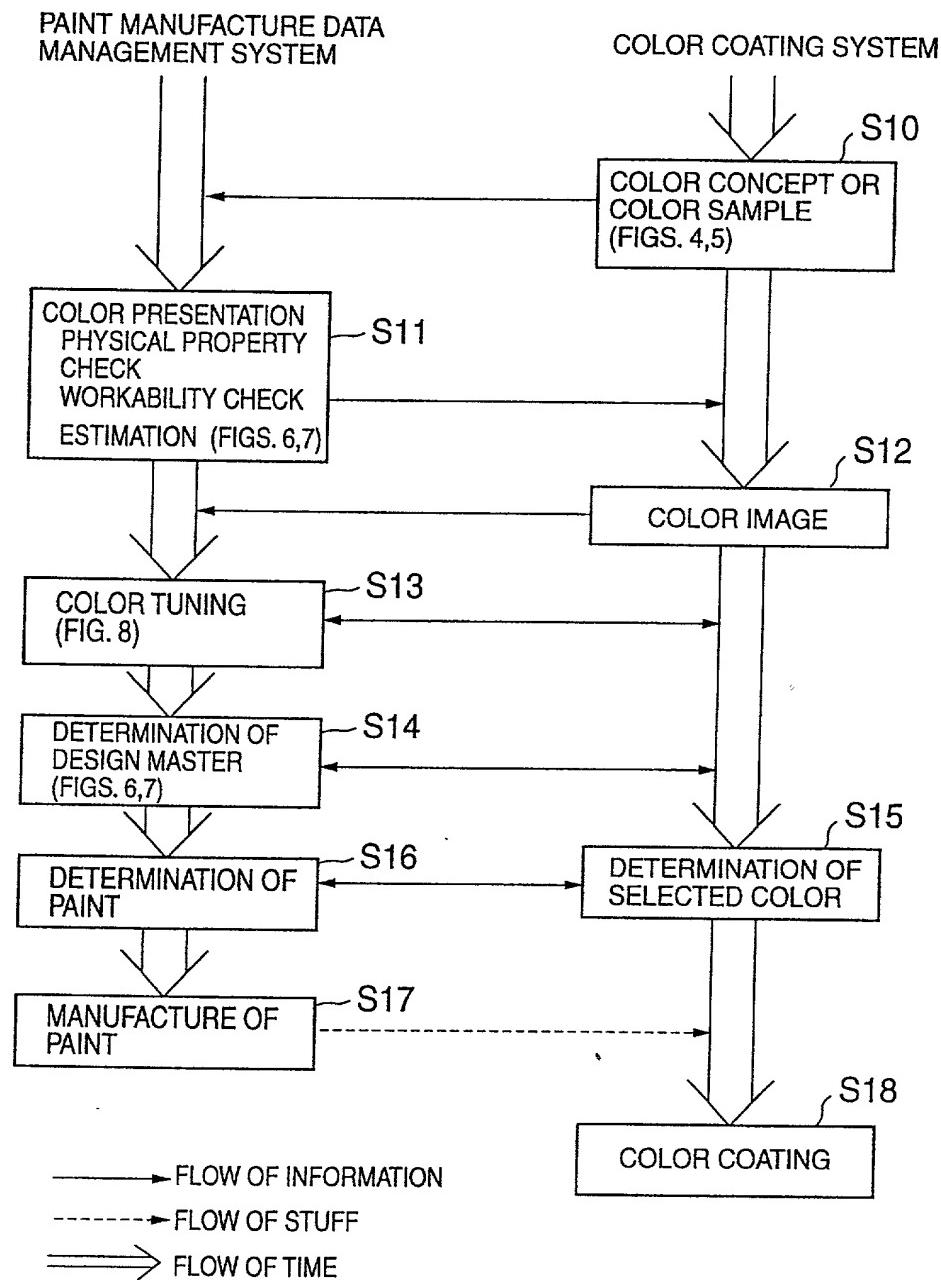

10,070743

FIG.6

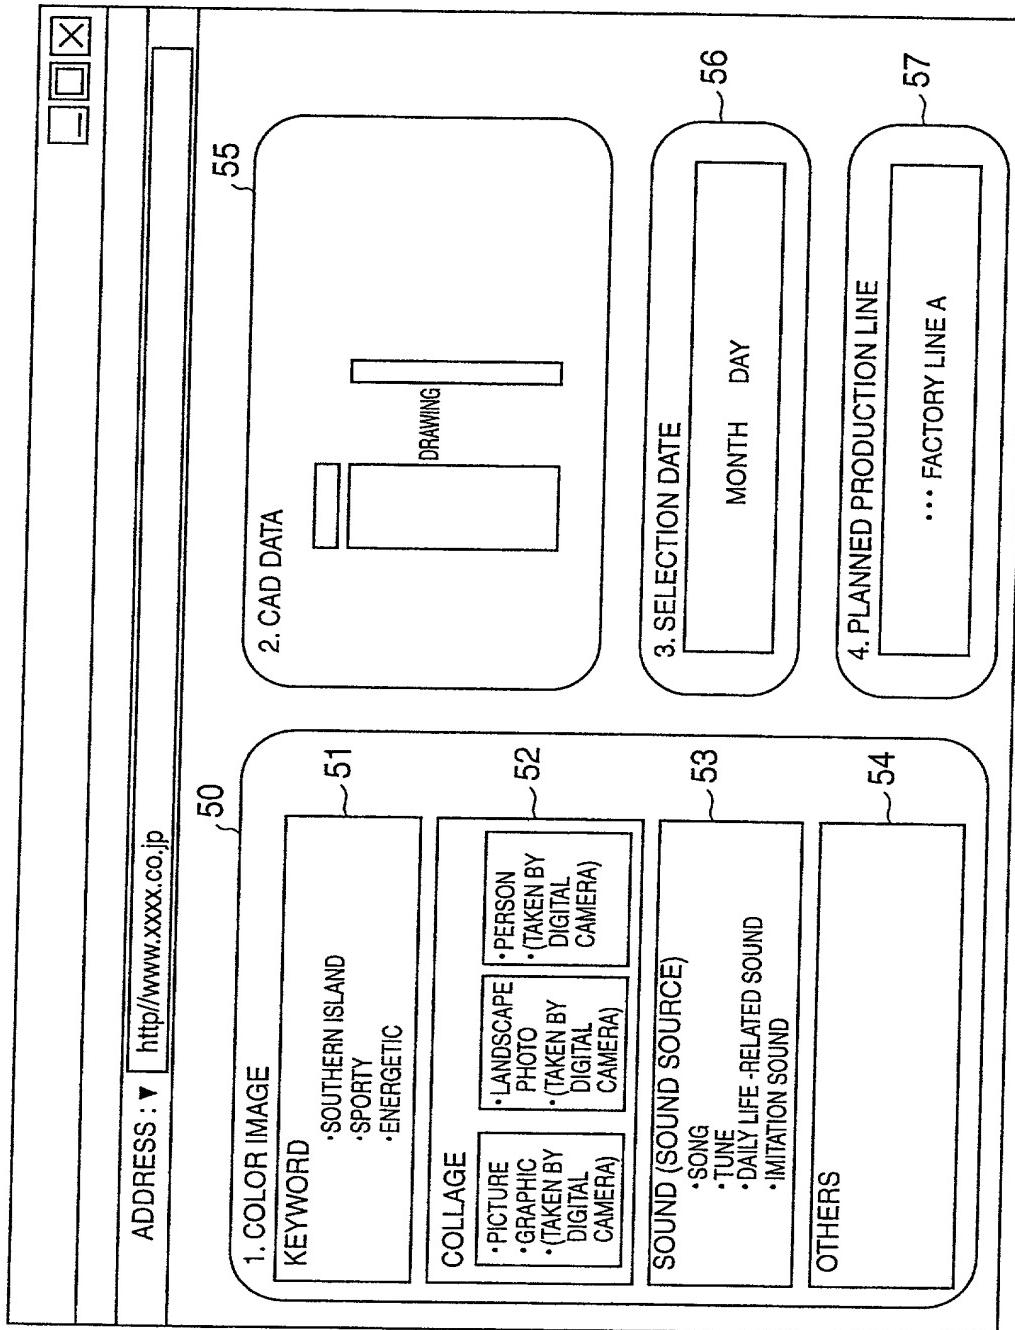

10,070743

FIG.7

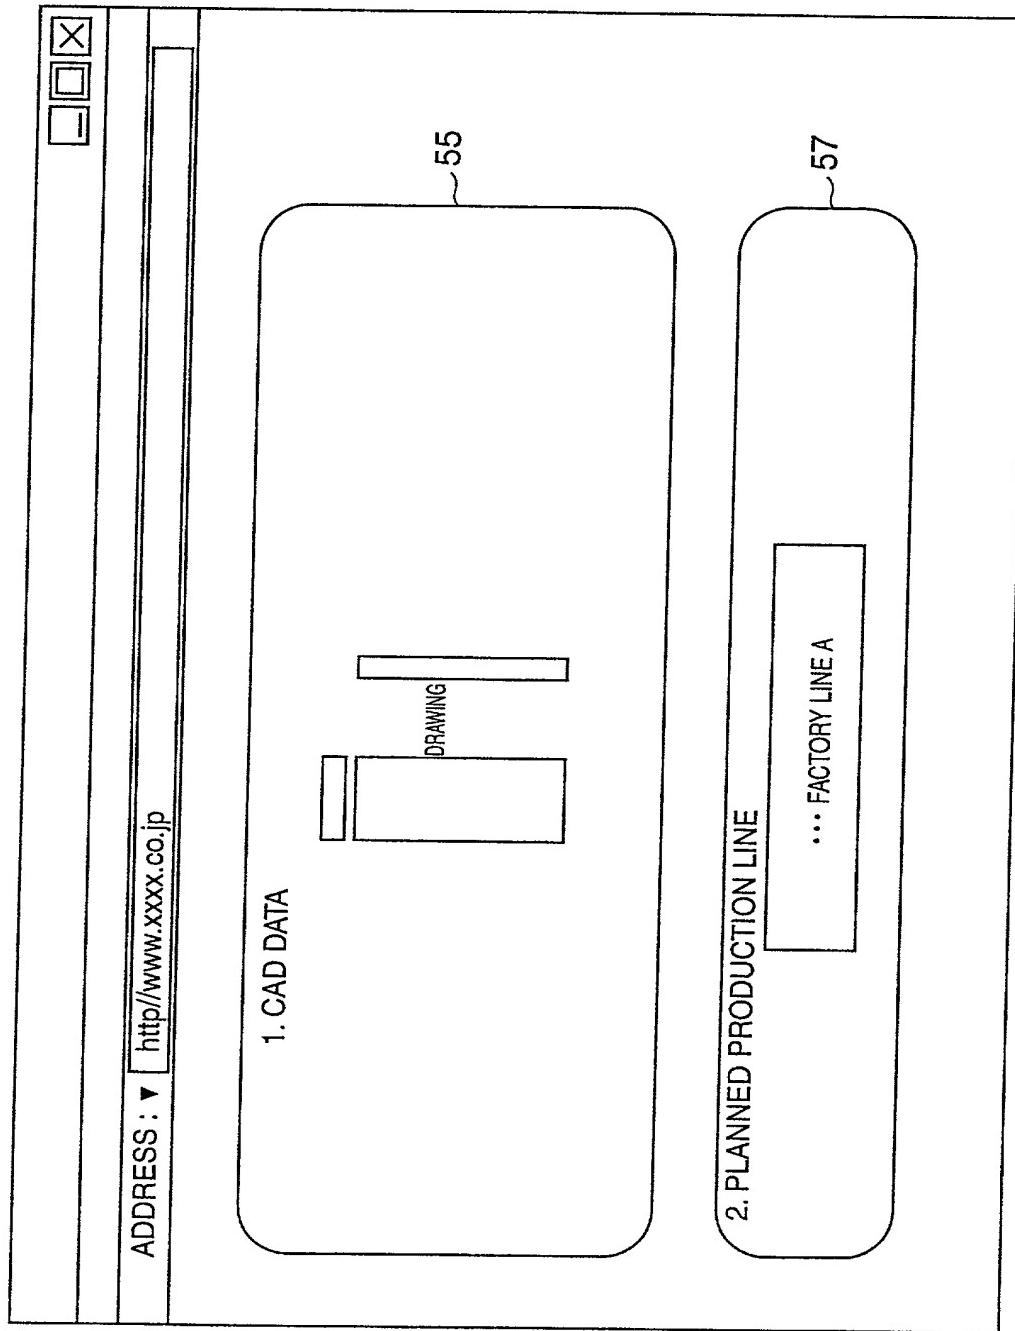


FIG.8

1. THREE-DIMENSIONAL SCREEN PROPOSALS 1~20		60
ADDRESS : ▶ <a href="http://www.xxxx.co.jp">http://www.xxxx.co.jp</a>		
3. MIXTURE INFORMATION • PIGMENT a( )b( )c( ) • RESIN a( )b( )c( )		62
4. PHYSICAL PROPERTY INFORMATION OVERALL RESULT : OK • WEATHERING RESISTANCE..... 240h OK • LIGHT STABILITY..... 240h OK • CHEMICAL RESISTANCE..... 240h OK		63
5. WORKABILITY INFORMATION • POSSIBILITY OF LINE TO BE APPLIED POSSIBLE • OTHER SPECIAL ARRANGEMENTS POSSIBLE		64
6. PRICE • UNIT PRICE YEN/kg → YEN UNIT • AMOUNT OF USE g		65
7. DATE OF DELIVERY MONTH DAY		66
2. PAINT MANUFACTURER CONCEPT 1. 2. 3.		61

FIG.9

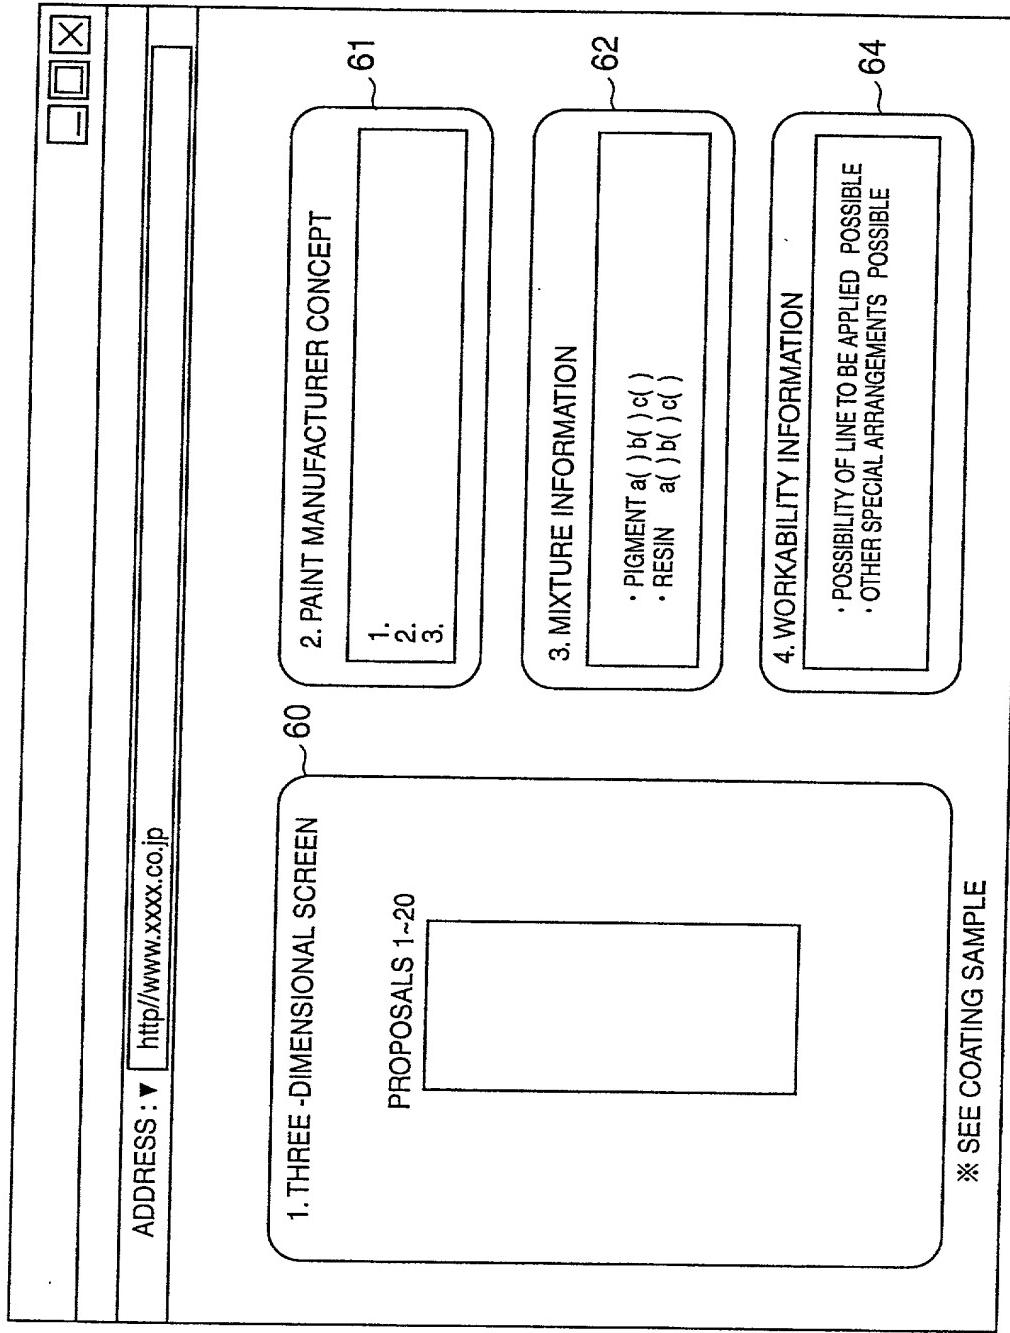


FIG.10

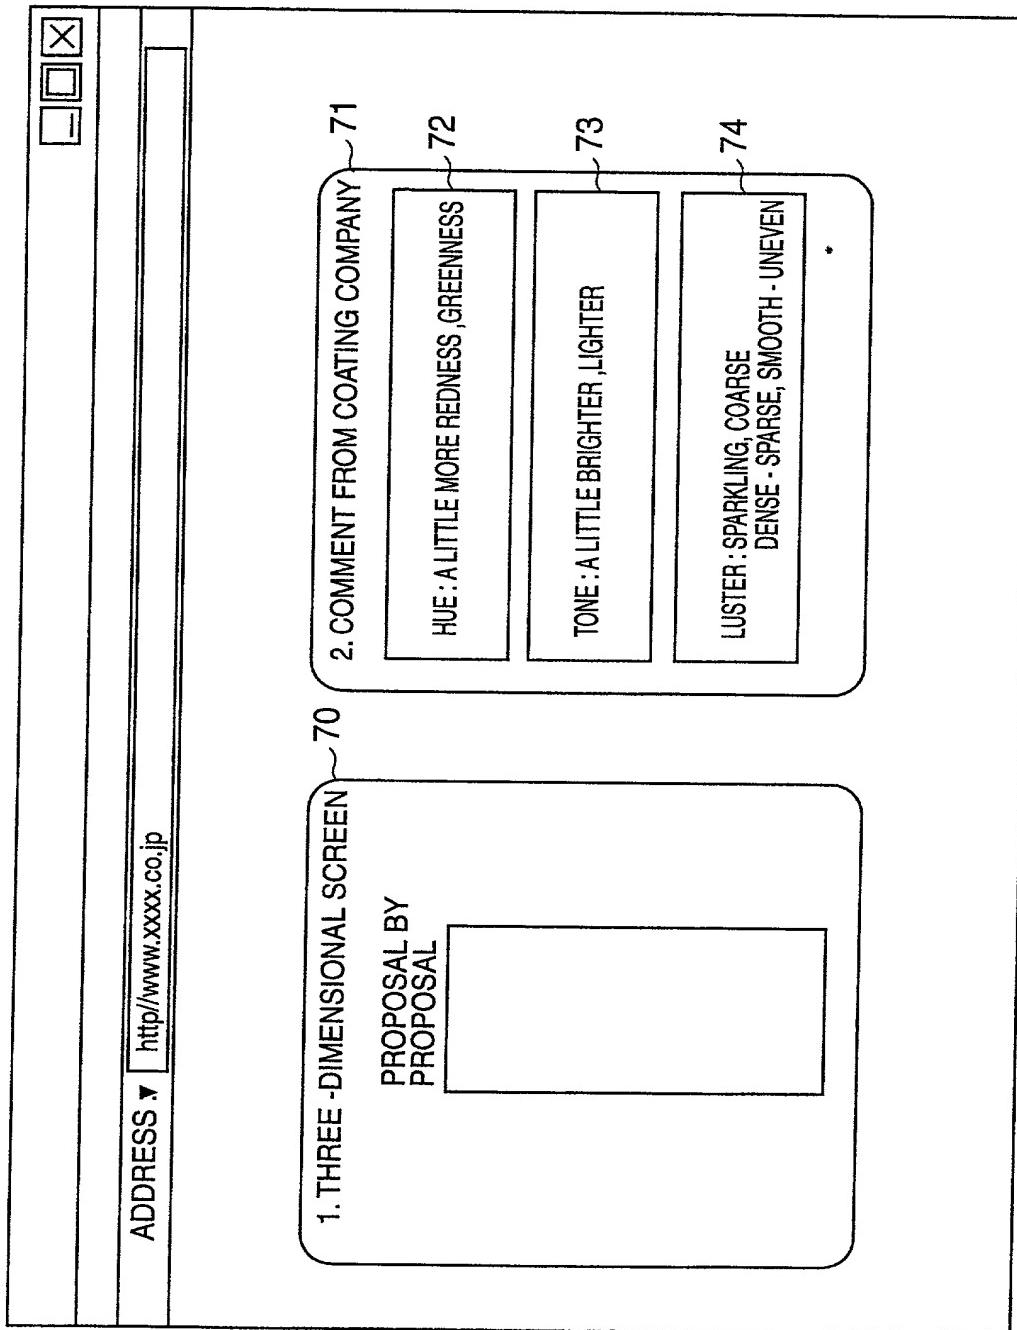


FIG.11

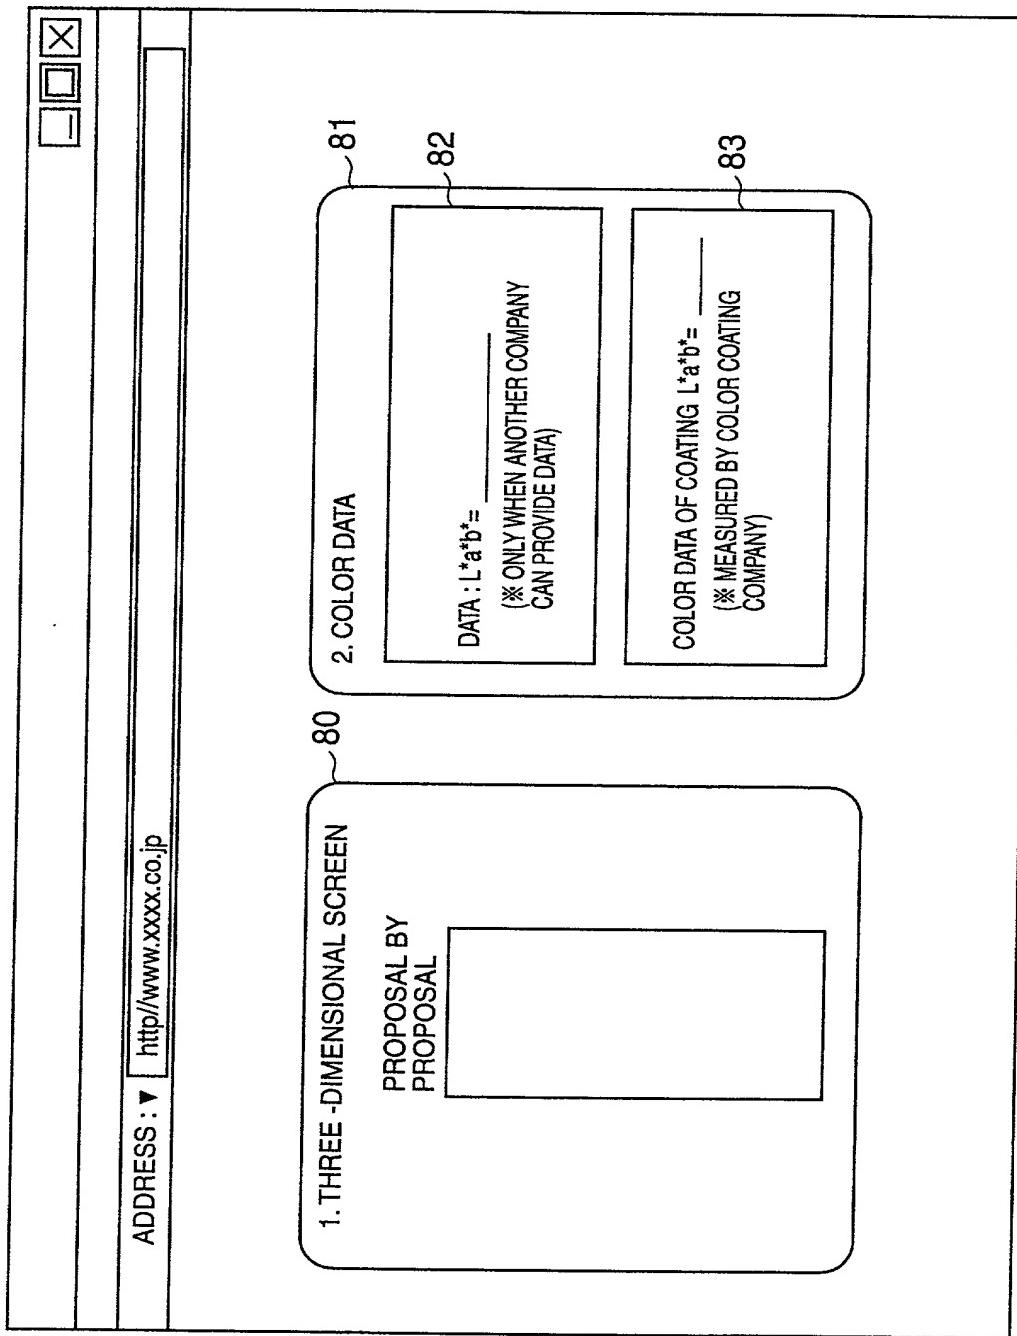


FIG. 12

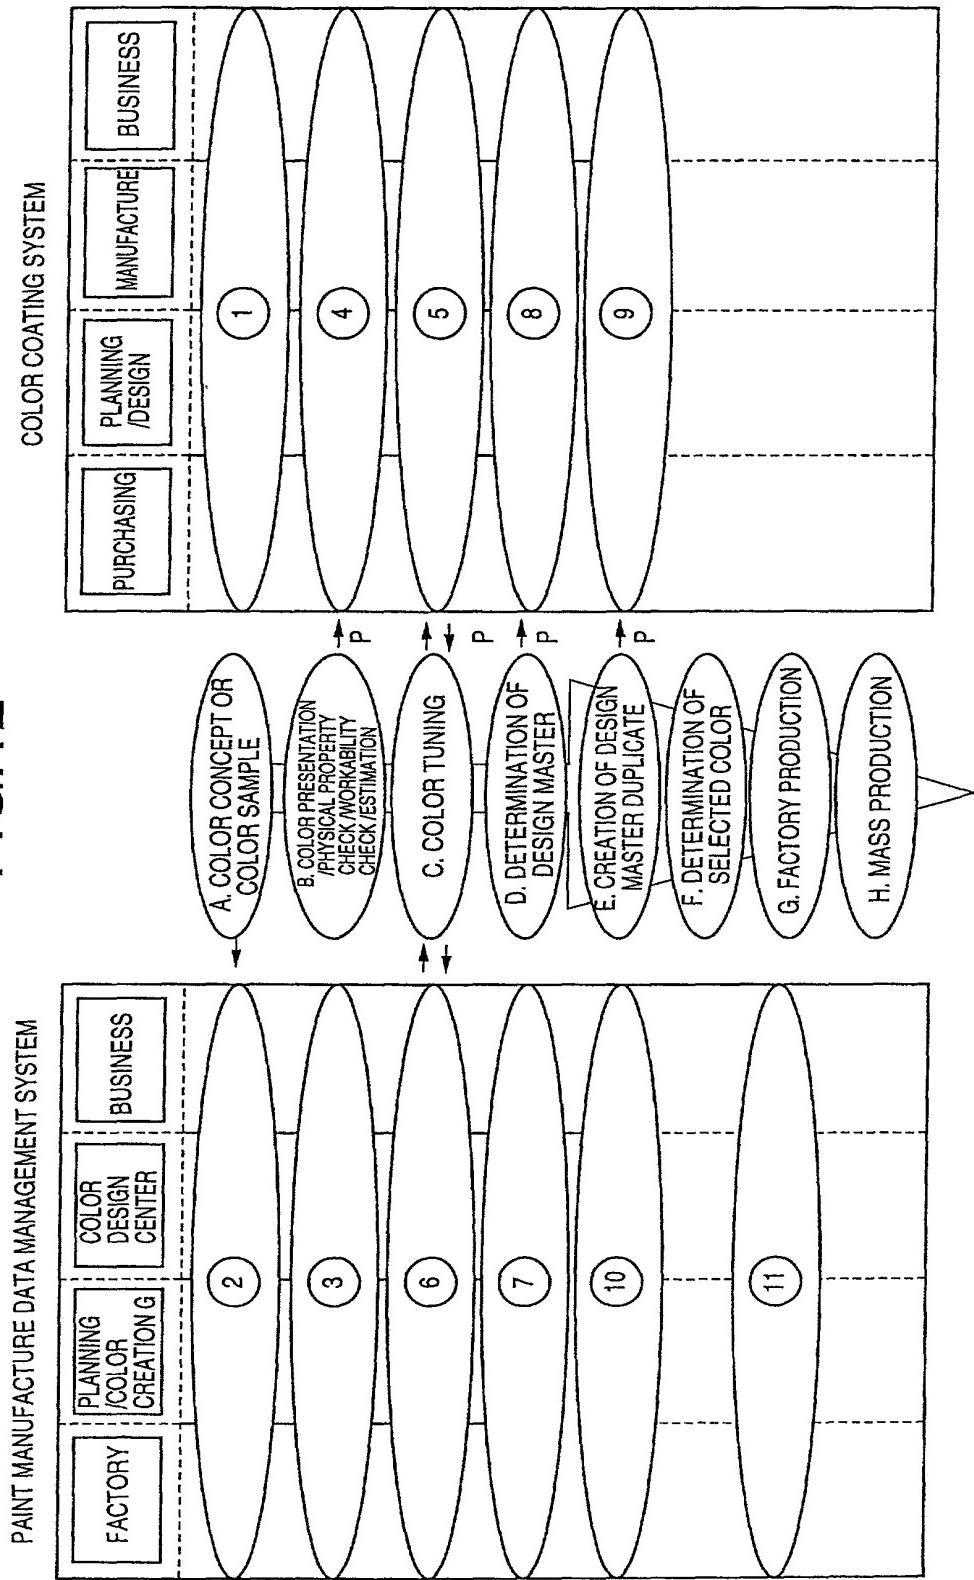


FIG. 13

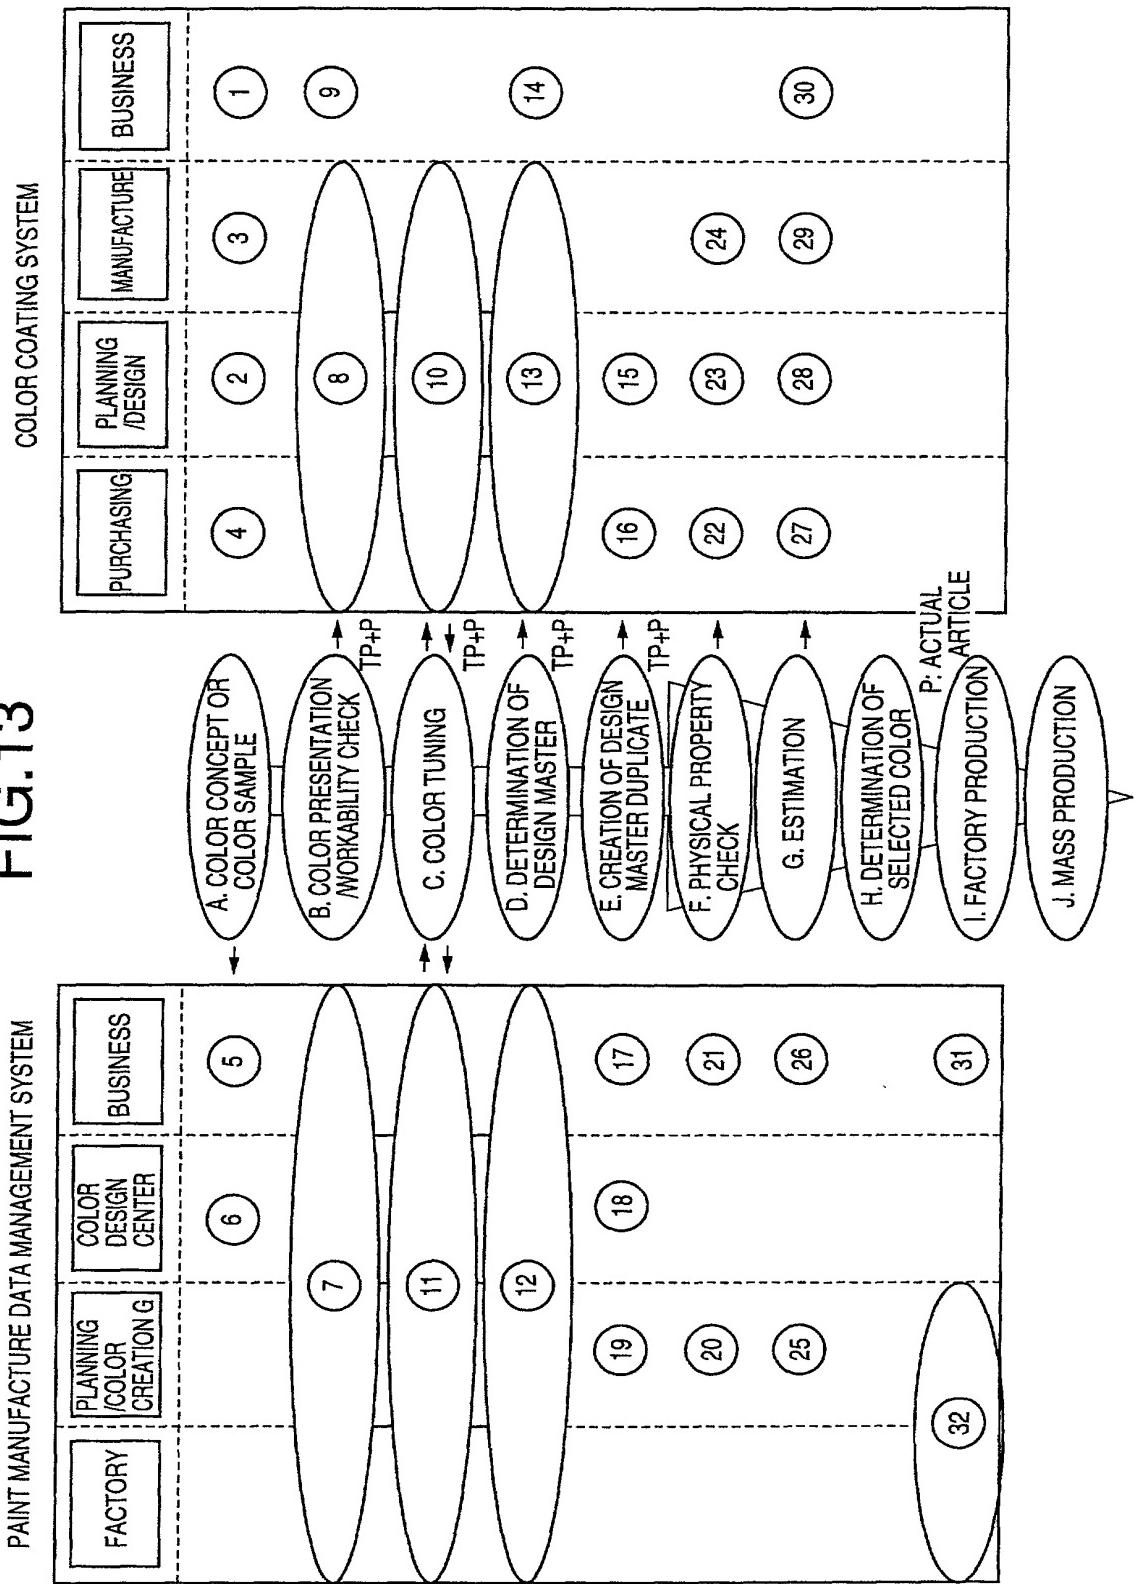


FIG. 14

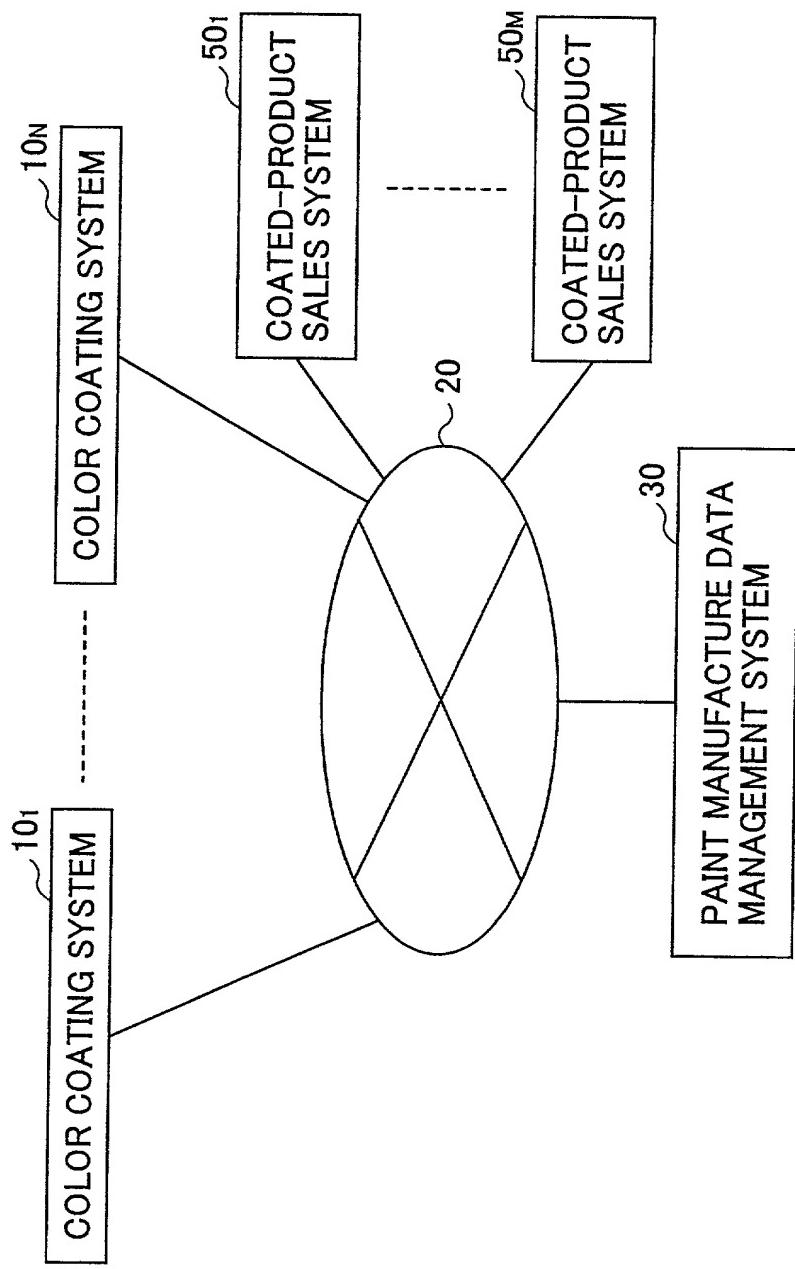


FIG.15


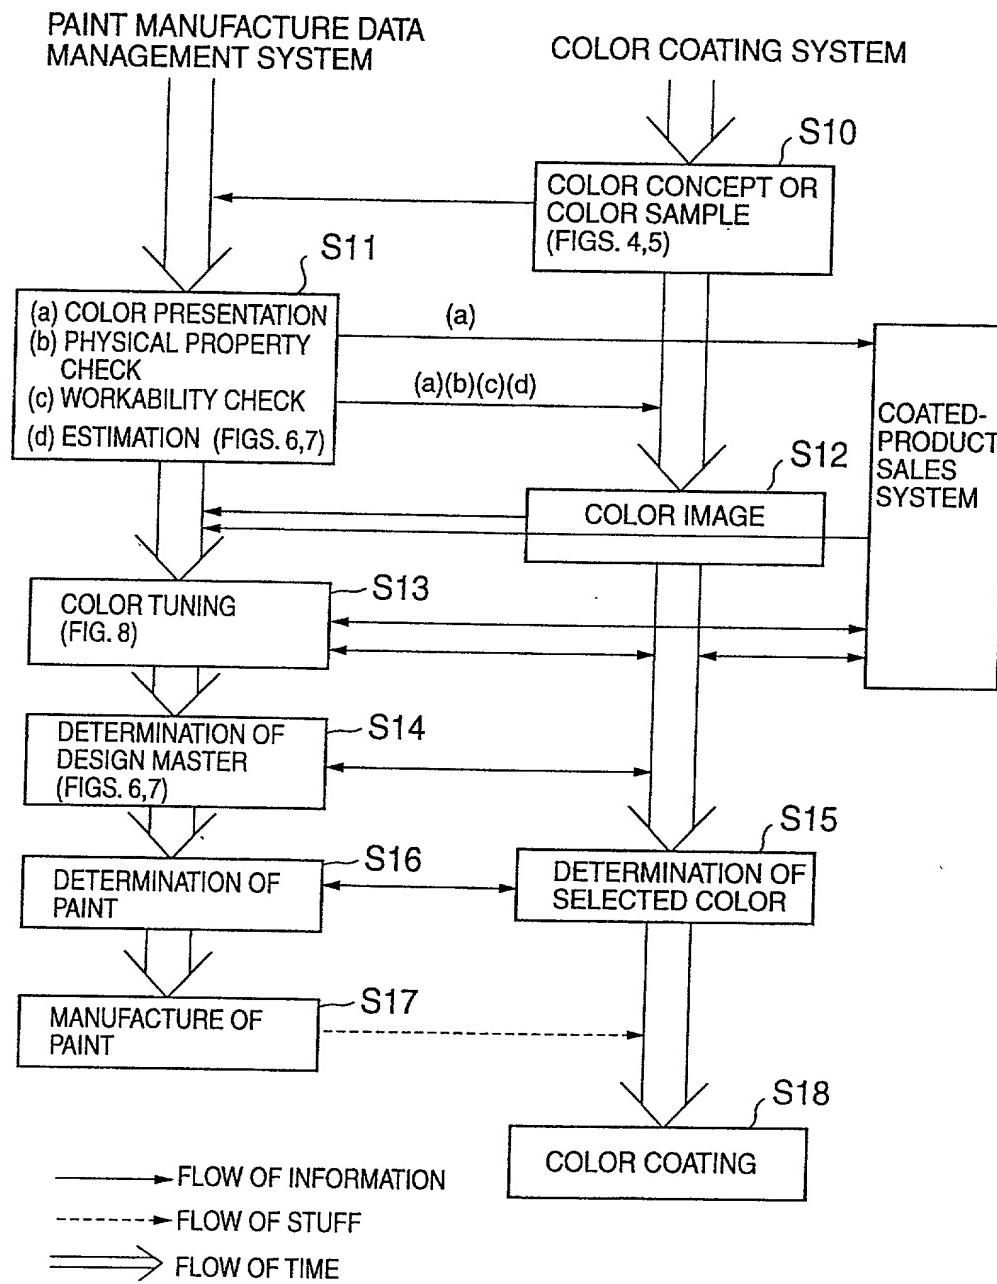


FIG. 16

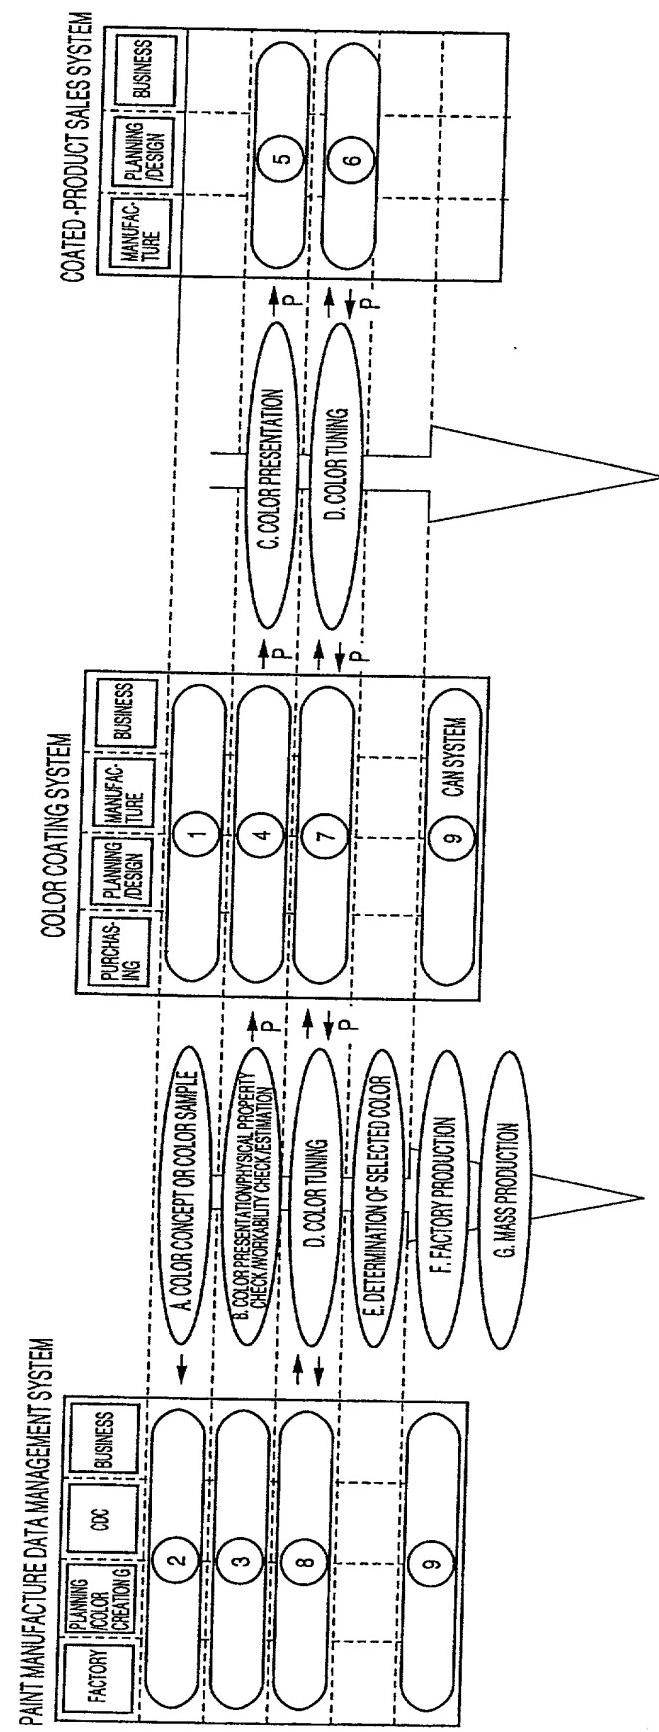

10,070743

FIG. 17

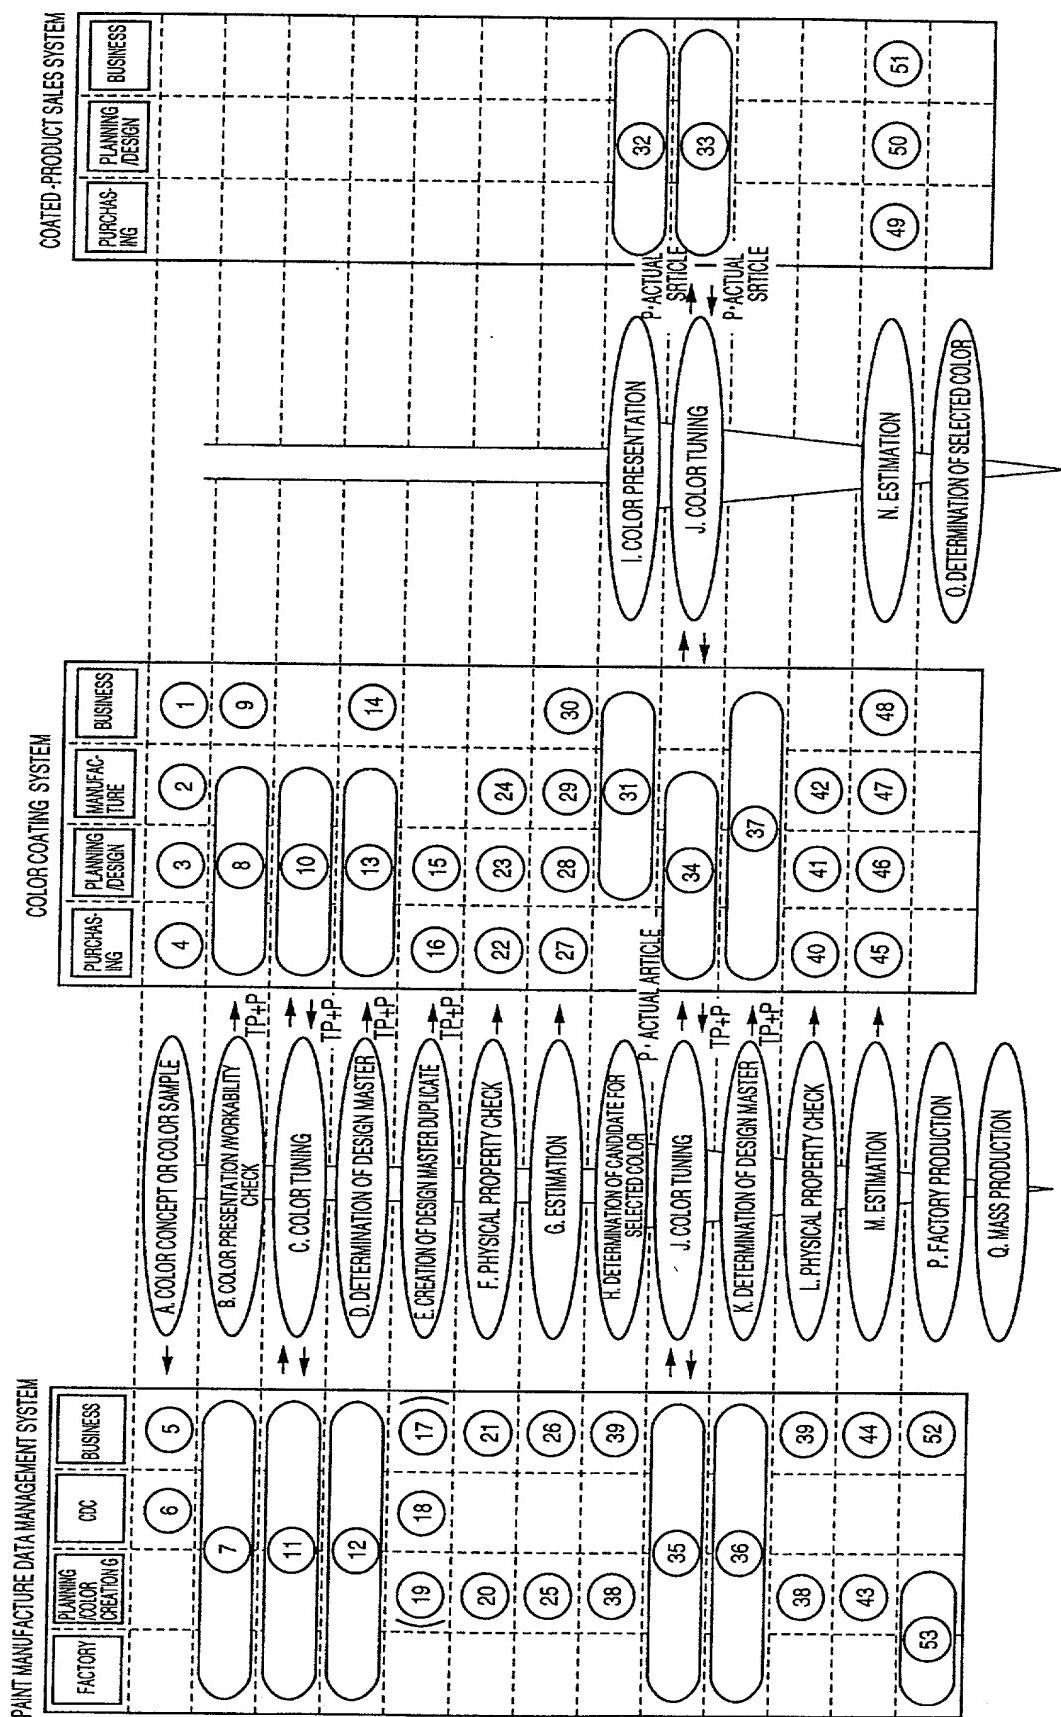


FIG.18

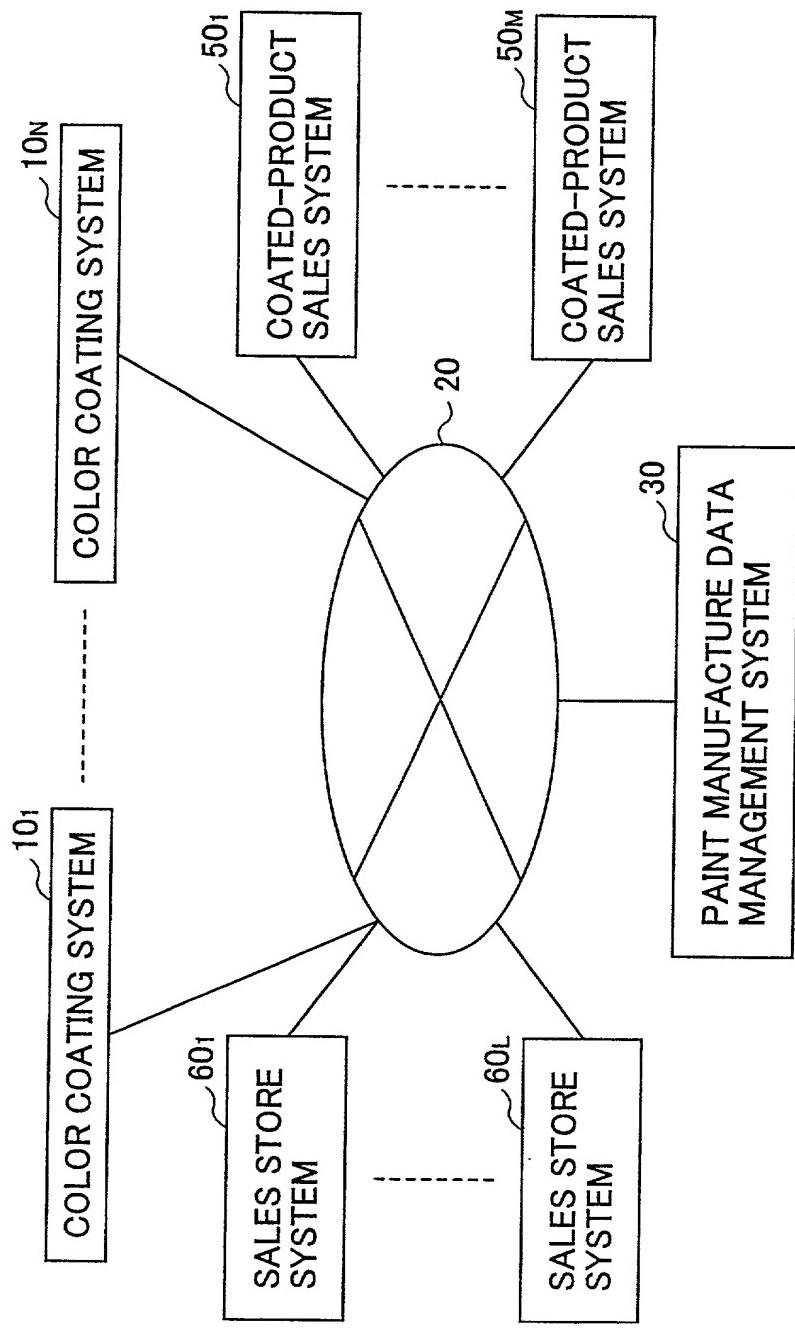


FIG. 19

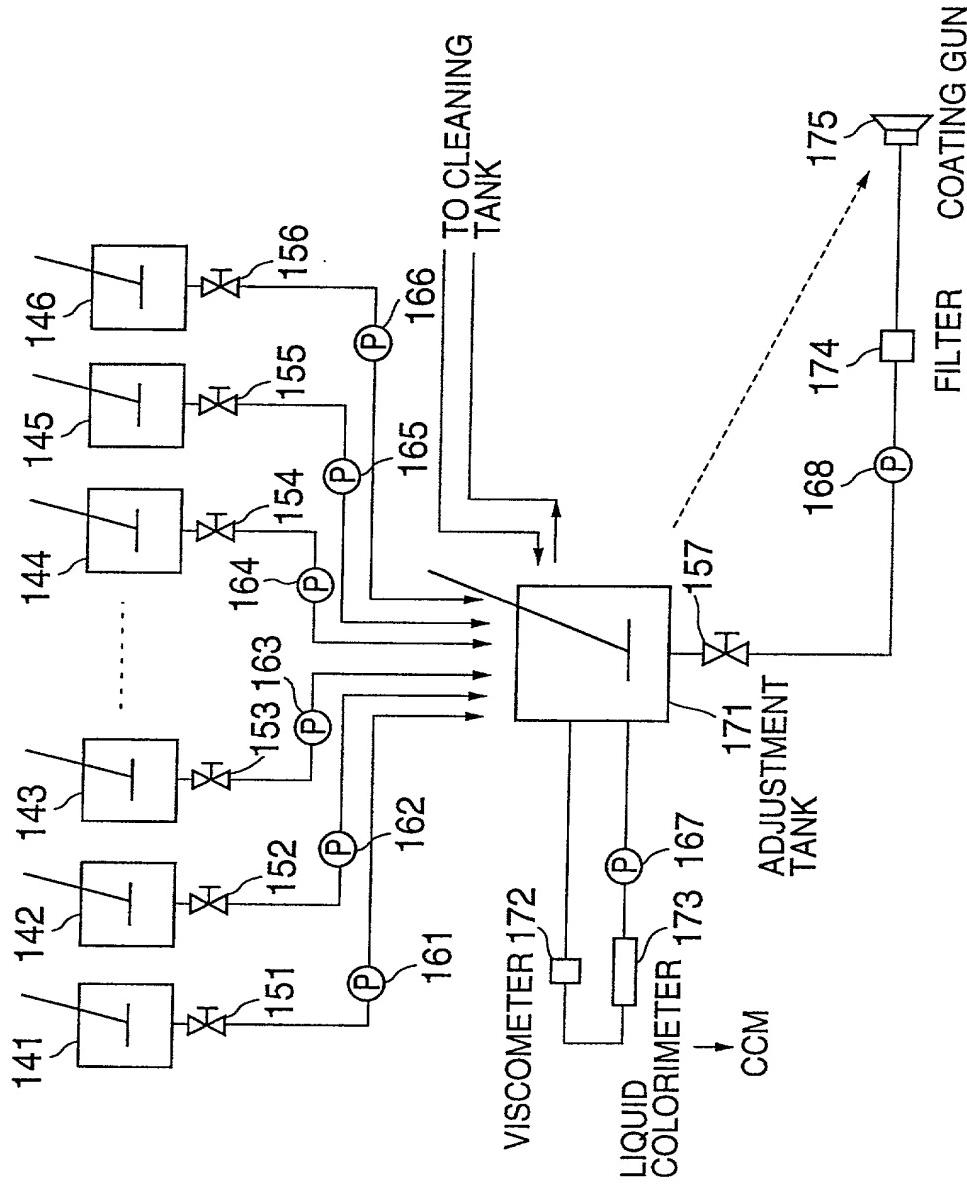


FIG.20

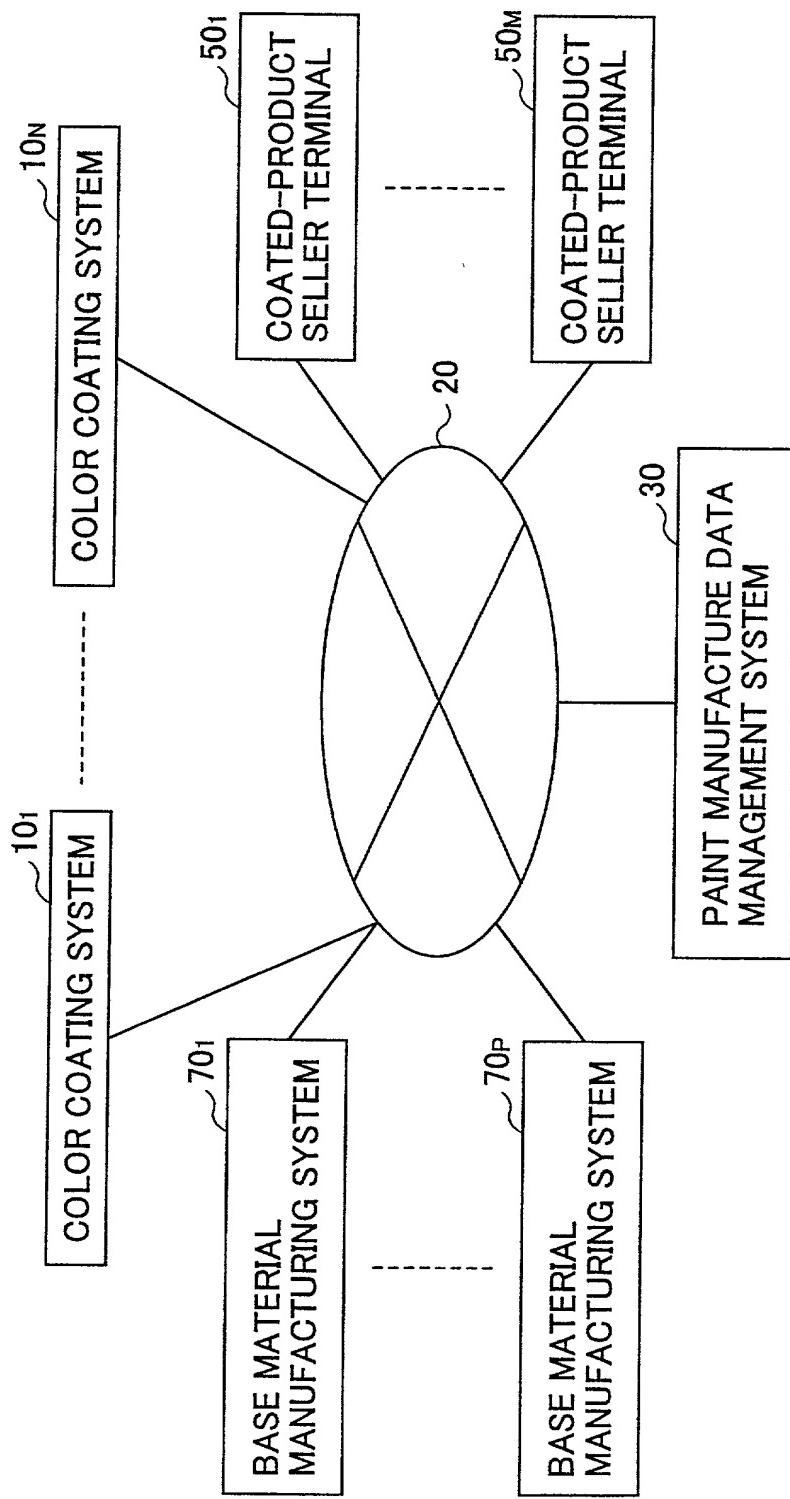


FIG.21

